

Disc Valve - DV

B-10 Series

Model: DV-GB-11E

Type: E- Exhaust

Construction: Galvanized Steel (GI)

Description

Disc Exhaust valves are used for air extraction applications. The multiple contour construction provides a uniform circular air pattern which makes it suitable for variable air volume applications, maintaining high efficiency.

The construction is of steel sheet, with mounting ring made of galvanized steel which is used for easy installation. Disc is attached to the frame by threaded rod.

Foam gasket is provided along the back of the frame to maintain tight seal and avoid air leakage and the air flow can be adjusted by regulating the cone up or down.

All models are available in plastic, aluminum with any color to suit according to the design conditions.

Disk valves can be installed in wall, ceiling or exposed air ducts with mounting rings and can be used in toilets, bathrooms and kitchens.

Standard Construction

Frame

Steel Sheet

Disc

Steel Sheet

Mounting Ring

Galvanized steel


Finish

Available with RAL powder coating, please specify color.

Optional Fittings


Finish

Mill finish or Chrome plating.

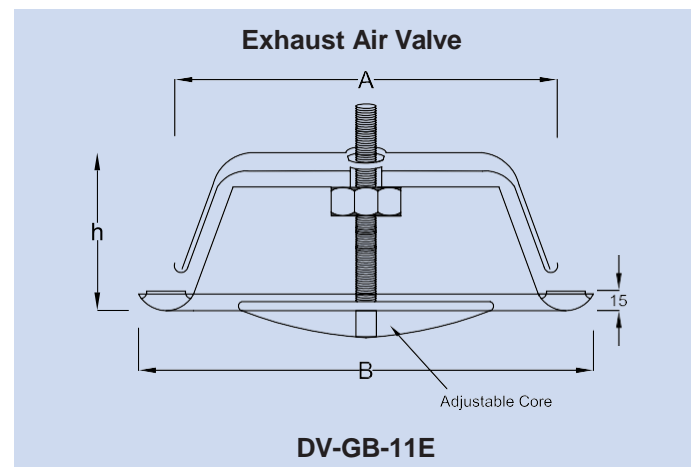

Dimensions for Disc Valve Model : DV-GB-11E

N = Nominal Duct Dia (mm)	A = Neck Size (mm)	B = Face Size (mm)	h
100	98	140	55
150	148	200	60
200	198	248	65

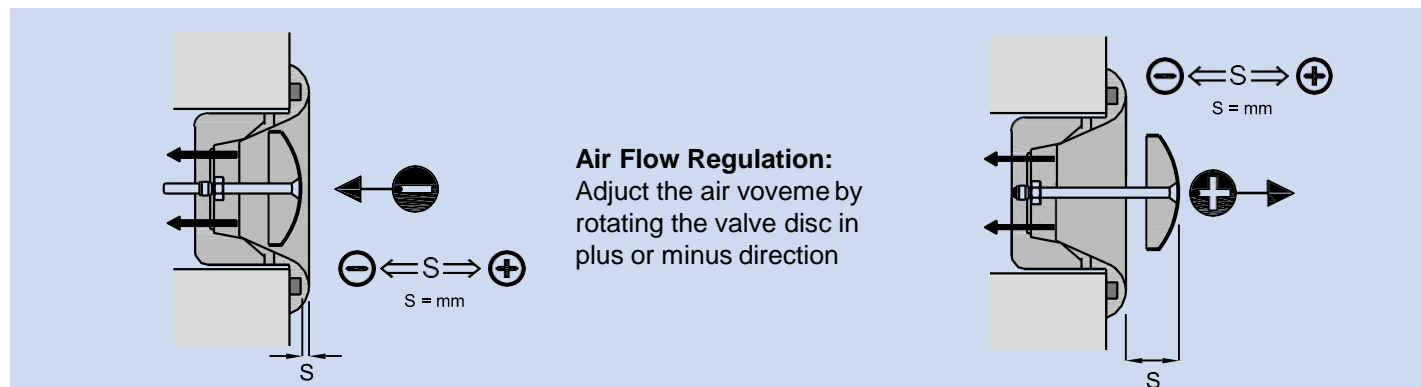

Selected Products of the company have been Classified / Listed / Tested by various international testing authorities.

Disc Valve - DV
B-10 Series
Engineering And Performance Data
Model: DV-GB-11S/E
Type: S- Supply; E- Exhaust
Construction: Galvanized Steel (GI)

Neck Diameter in mm				Airflow								
	100	150	200	CFM	10	20	40	60	80	100	120	140
Opening in mm	-12			Ps	0.36							
				NC	17							
	-9			Ps	0.18	0.68						
				NC	17	22						
	-6			Ps	0.08	0.32	0.8	1.2				
				NC	17	23	26	32				
	0	-12	-15	Ps	0.04	0.2	0.48	0.8				
				NC	19	21	30	34				
	6			Ps		0.12	0.28	0.48	0.8			
				NC		22	31	37	43			
			-15	Ps		0.08	0.16	0.32	0.5			
				NC		20	34	39	45			
	12	-6		Ps		0.08	0.12	0.2	0.32	0.8		
				NC		20	30	36	43	47		
		0		Ps			0.06	0.1	0.16	0.36	0.68	
				NC			26	34	40	45	49	
			-6	Ps				0.06	0.1	0.24	0.4	0.88
				NC				29	38	46	>50	>50
		12		Ps					0.06	0.12	0.24	0.6
				NC					35	43	>50	>50

Note:

1. Airflow is measured in Cubic foot/ minute (CFM).
2. Static Pressure (Ps) is measured in inch water guage (in.w.g).
3. Noise Criteria (NC) is measured in decibals (dB).

Selected Products of the company have been Classified / Listed / Tested by various international testing authorities.